



Project Name:

Type:

Catalog#:

The EX-Lite VP LED vapor tight light is an energy efficient durable enclosed fixture designed for wet and damp to withstands rugged environments.

It is vandal resistant and can be used both indoors and outdoors like carport, parking garage, canopies, storage rooms, garden centers, food service and other wet locations.

Ordering Information: (Example: VP-40W-50K)

Model	Wattage	CCT	Voltage	Controls
VP	40W	40K	(blank=UNV) Standard 110/277V	(blank=none)
	60W	50K	HV 480V	OCC1 Occupancy Sensor Bi-Level
				OCC2 Occupancy Sensor On/Off
				EM Emergency Backup

Model	Lumens	Power	lm/W	CCT	CRI	Weight
VP-40W	5,200lm	40W	130lm/W	4000K/5000K	80+	5.6lb
VP-60W	7,800lm	60W	130lm/W	4000K/5000K	80+	5.6lb

Features & Specs

Construction:

- Lightweight, flexible and durable polycarbonate construction makes the luminaire vandal resistant and highly impact resistant.
- UV stabilized and glare-free polycarbonate diffuser.
- Large wiring compartment and multiple knockouts to accommodate lighting controls.

Mounting:

- Surface mount.
- Suspension mount.

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.
- 0-10V dimmable.

Optical:

- Glare-free wide beam frosted Polycarbonate diffuser.

Controls Options:

- Bi-Level & On/Off Occupancy sensor.
- Emergency backup.

Warranty:


- 5 years warranty for complete fixture.

Listings:


UL
DLC Premium
RoHs
IP65



Photometrics:

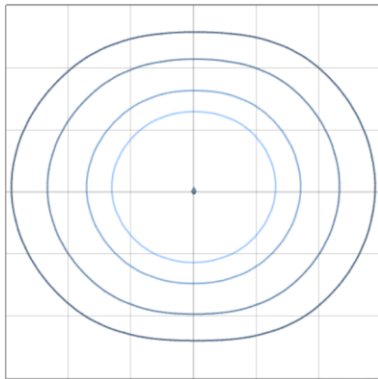


40W@15FT

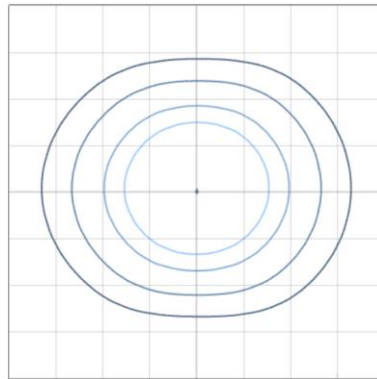

60W@15FT

0.1 fc
0.2 fc
0.5 fc
1 fc
MH 15

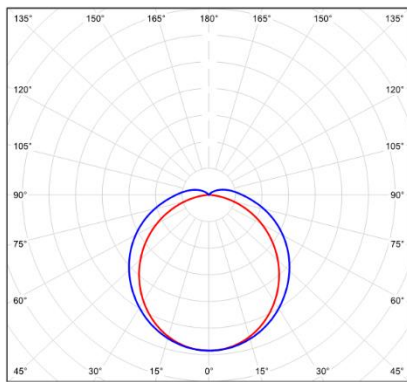

Polar Distribution

Dimensions:

