





Project Name

Type:

Catalog#

The EX-Lite WLP is an LED wrap light fixture with glarefree Prismatic diffuser that delivers general ambient lighting for indoor surface-mount applications such as canopies, corridors, utility rooms and garages.

It offers three different wattages with three different widths. Occupancy sensor and emergency backup are built inside the fixture when ordered to keep the fixture a clean look.

Ordering Information: (Example: WLP-40W-40K-EM)

Model	Wattage	ССТ	Voltage	Control
	-	_	_	_
WLP	40W	40K	(blank=UNV)	OCC1
			Standard 110/277V	Occupancy Sensor On/Off
	50W	50K	HV	OCC2
			480V	Occupancy Sensor Bi-Level
	60W			EM
				Emergency Backup

Model	Lumens	Power	lm/W	ССТ	CRI	Weight
WLP-40W	5,200lm	40W	130lm/W	4000K/5000K	80+	5.2lb
WLP-50W	6,500lm	50W	130lm/W	4000K/5000K	80+	6.3lb
WLP-60W	7,800lm	60W	130lm/W	4000K/5000K	80+	8.6lb

Features & Specs

Construction:

- -Die-formed from code gauge cold-rolled steel.
- -Post painted with high gloss baked white matte powder coat
- Large wiring compartment and multiple knockouts to accommodate lighting controls.

Mounting:

-Surface mount.

Electrical:

- -High Power Factor, low THD UL listed driver with 5KV surge
- -Universal line voltage input 120-277V, 347/480V optional
- -0-10V dimmable.

Optical:

-Glare-free wide beam prismatic diffuser.

Controls Options:

- -Bi-Level Occupancy sensor.
- -Emergency backup.

Warranty:

-5 years warranty for complete fixture.

Listings:

UL Locations.

DLC

RoHs

IP65












Photometrics:

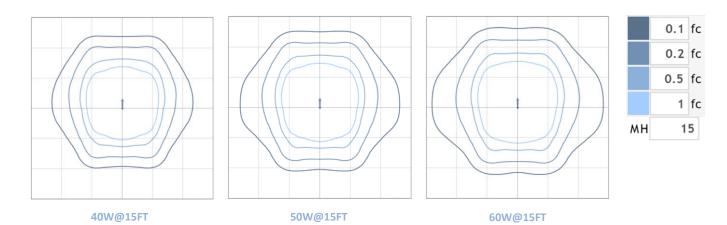




Polar Distribution

Dimensions:





50W

