



Project Name:

Type:

Catalog#:

The EX-Lite WLF is an LED wrap light fixture with glare-free Frosted diffuser that delivers general ambient lighting for indoor surface-mount applications such as canopies, corridors, utility rooms and garages.

It offers two different wattages with two different widths. Occupancy sensor and emergency backup are built inside the fixture when ordered to keep the fixture a clean look.

Ordering SKU: (Example: WLF-50W-50K)

Model	-	Wattage	-	CCT	-	Voltage	-	Control
WLF		40W		40K		(blank=UNV) Standard 110/277V		OCC1 Occupancy Sensor On/Off
		50W		50K		HV 480V		OCC2 Occupancy Sensor Bi-Level
		60W						EM Emergency Backup

DLC Model	Lumens	Power	lm/W	CCT	CRI	Weight
YRWA-40121	5,200lm	40W	130lm/W	4000K/5000K	80+	5.2lb
YRWA-50121	6,500lm	50W	130lm/W	4000K/5000K	80+	6.3lb
YRWA-60121	7,800lm	60W	130lm/W	4000K/5000K	80+	8.6lb

# Features & Specs

## Construction:

- Die-formed from code gauge cold-rolled steel.
- Post painted with high gloss baked white matte powder coat
- Large wiring compartment and multiple knockouts to accommodate lighting controls.

## Mounting:

- Surface mount.
- Suspension mount.

## Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- 0-10V dimmable.

## Optical:

- Glare-free wide beam frosted diffuser.

## Controls Options:

- Bi-Level Occupancy sensor.
- Emergency backup.

## Warranty:


- 5 years warranty for complete fixture.

## Listings:

- UL Damp Locations.
- DLC
- RoHs
- IP65



## Photometrics:

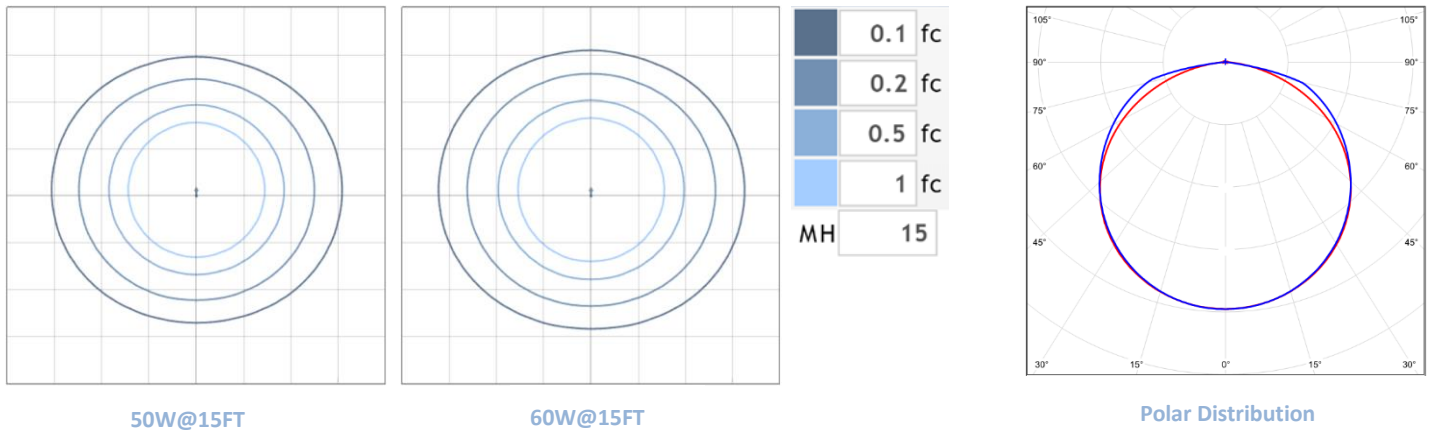

## Dimensions:

