



Project Name:

Type:

Catalog#:

The CPR series is a round shape white finish LED fixture design for low bay and under canopy applications. It can be surface mount under canopy and pedant mount as low bay.

Its unique Fresnel Lens offers glare-free ultra-wide beam spread which is perfect for low ceiling parking structures and low bay lighting.

Ordering SKU:

SKU	Wattage	CCT	Control	Finish Color	Voltage
CPS-40W-C	40W=40W	50K=5000K	(blank)=none, Std	(blank)=White, Std	(blank)=120/277VAC, Std
CPS-60W-C	60W=40W	40K=4000K	PCB =Button Photocell OCC =Bi-Level Sensor EM =Emergency Backup	BL =Black GR =Gray	HV =347/480VAC

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
CPS-40W-C	40W	5,200lm	130lm/W	4000K/5000K	80+
CPS-60W-C	60W	7,800lm	130lm/W	4000K/5000K	80+

Features & Specs

Construction:

- Aesthetically beautiful white finish.
- Die cast aluminum housing with external cooling fins.
- IP65 for wet and damp locations.

Mounting:

- Special mounting plate without opening the fixture.
- 3/4" pendant mount.

Electrical:

- High Power Factor, low THD UL listed driver.
- Universal line voltage input 120-277V, 347/480V optional.
- 0-10V dimmable.

Optical:

- Glare-free Fresnel diffuser.

Controls Options:

- Button style eye photocell.
- Build-in Occupancy sensor.
- Emergency backup.

Warranty:


- 5 years warranty for complete fixture.

Listings:


- UL
- DLC Premium
- RoHs
- IP65



Photometrics:

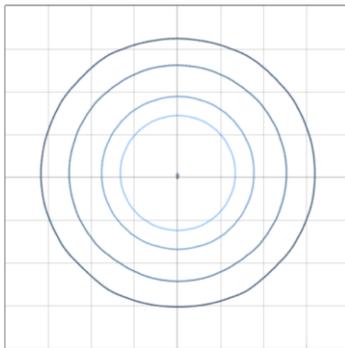


40W@15FT



60W@15FT

0.1 fc
0.2 fc
0.5 fc
1 fc
MH 15

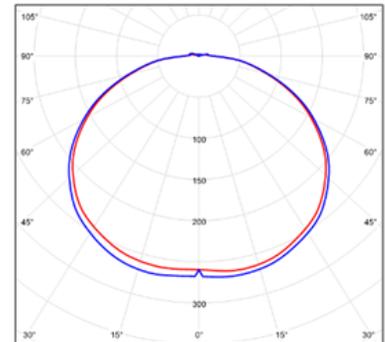

Polar Distribution

Dimensions:

