



Project Name:

Type:

Catalog#:

The FLL is a heavy-duty high-power LED flood light designed to replace up to 800W MH traditional flood. It delivers such high performance with a compact design thanks to its excellent heat dissipation.

It can be widely used in all exterior flood lighting application with its standard 2 3/8" Slipfitter and Yoke mount.

Ordering SKU:

Family	Wattage	CCT	Control	Finish Color	Voltage
FLL	150W=150W	30K=3000K	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
Flood Light	200W=200W	40K=4000K 50K=5000K	PCN=NEMA Photocell	BL=Black WH=White GR=Gray	HV=347/480VAC

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
FLL-150W	150W	19,500lm	130lm/W	4000K/5000K	70+
FLL-200W	200W	26,000lm	130lm/W	4000K/5000K	70+

Features & Specs

Construction:

- Low profile and heavy-duty.
- Superior heat sinking with external Air-Flow fins.
- IP65 for wet and damp locations.

Mounting:

- 2 3/8" Slipfitter Mount.
- Yoke Mount.

Electrical:

- High Power Factor, low THD UL listed driver.
- Universal line voltage input 120-277V, 347/480V optional
- FCC compliant.

Optical:

- On-Chip optic designed for better focusing without glare.

Controls Options:

- NEMA photocell.

Warranty:


- 5 years warranty for complete fixture.

Listings:

- UL
- DLC
- RoHs
- IP65



Photometrics:

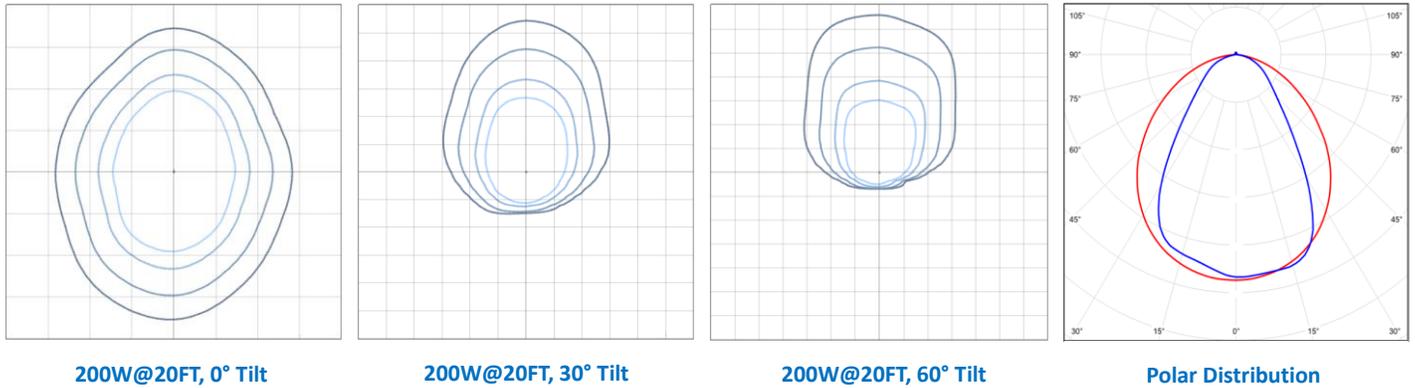

Dimensions:

