

General Description:

The EX-LITE PTL Post Top Area Light is the most state-of-the-art LED outdoor fixture for high end area lighting like hotel and restaurant applications.

Construction:

- Stylish parachute shape large die-cast housing.
- Corrosion resistant polyester powder coat finish, available in custom colors
- Cast aluminum structure that resists high shock and vibration
- Integrated cooling fins maximize heat capacity

Mounting:

- Fit into any pole less than 2 ½" with only two hex bolts.

Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- FCC compliant
- 0-10V dimmable optional

Optical:

- IES Type II, Type III, Type IV and Type V distribution patterns
- Optics are interchangeable and easily replaceable
- Full range CCT from 3000K to 5000K

Warranty:

- 5 years' warranty for complete fixture

Listings:

- ETL
- FCC
- DLC
- RoHs
- IP65



Ordering Information:

Family Model	Wattage	CCT	Optic	Color	Mounting	Input Voltage
PTL	150W=150W	50K=5000K	(blank)=Type V,Std	(blank)=Bronze, Std	(blank)=Post-Top Mount, Std	(blank)=120-277V, Std
	200W=200W	40K=4000K	T2=Type II	BL=Black		HV=347-480V
	300W=300W	30K=3000K	T3=Type III	WH=White		
	400W=400W		T4=Type IV	GR=Gray		


PROJECT NAME: _____ CATALOG NUMBER: _____

NOTES: _____ FIXTURE TYPE: _____

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
PTL-150W	150W	19,500lm	130lm/W	3000K/4000K/5000K	75+
PTL-200W	200W	26,000lm	130lm/W	3000K/4000K/5000K	75+
PTL-300W	300W	39,000lm	130lm/W	3000K/4000K/5000K	75+
PTL-400W	400W	52,000lm	130lm/W	3000K/4000K/5000K	75+

Photometrics:

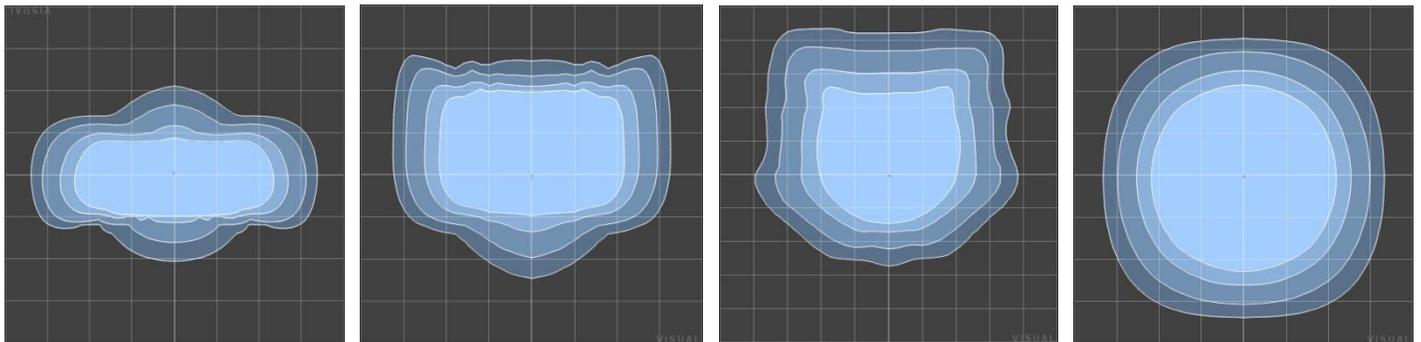


Type II

Type III

Type IV

Type V

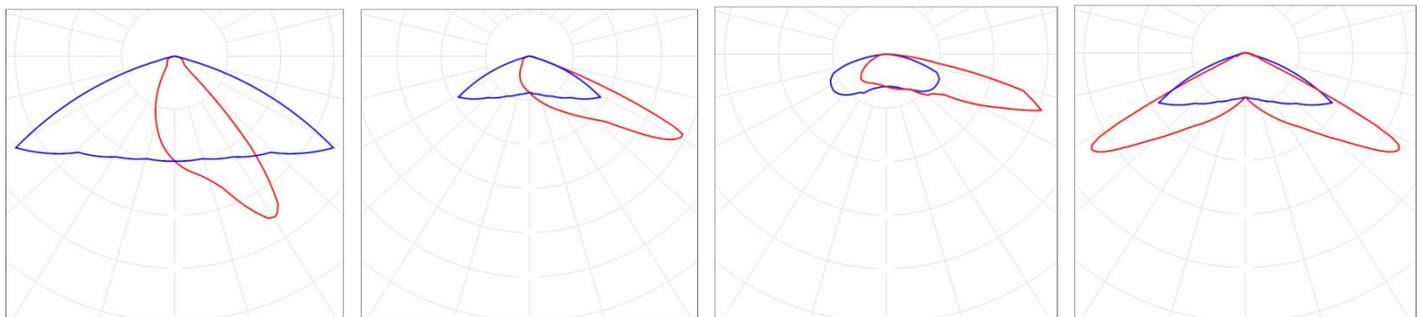

Type II

Type III

Type IV

Type V

Lighting Layout:

