

### General Description:

The WPG Wall Pack is a classic wall mounted luminaire integrated with latest LED light engine technology. It keeps the same look as traditional wall pack while the interior is redesigned to maximize heat dissipation. The prismatic glass lens will throw the light far and will not turn yellow for years to come.

### Construction:

- Heavy duty aluminum housing.
- Internal heatsink for long lifespan.
- Prismatic glass diffuser.
- IP65 for wet and damp locations.

### Mounting:

- Regular in-wall J-box

### Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- 0-10V dimmable optional

### Optical:

- Glare proof prismatic glass diffuser
- Outstanding **140lm/W**

### Controls:

- Inside Occupancy sensor
- Button Style photocell optional

### Warranty:

- 5 years warranty for complete fixture

### Listings:

- ETL
- DLC
- RoHs
- IP65



### Order Info:

Model	Wattage	CCT	Control	Color	Voltage
WPG Classic Wall Pack	40W=40W	30K=3000K	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
	60W=60W	40K=4000K	PCB=Button Photocell	BL=Black	HV=347/480VAC
	80W=80W	50K=5000K	OCC01=On/Off Sensor	WH=White	
	100W=100W		OCC02=Bi-Level Sensor	GR=Gray	
	120W=120W		EM=Emergency Backup		



PROJECT NAME: \_\_\_\_\_ CATALOG NUMBER: \_\_\_\_\_

NOTES: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_

### Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
WPG-40W	40W	5,600lm	140lm/W	3000K/4000K/5000K	80
WPG-60W	60W	8,400lm	140lm/W	3000K/4000K/5001K	80
WPG-80W	80W	11,200lm	140lm/W	3000K/4000K/5002K	80
WPG-100W	100W	14,000lm	140lm/W	3000K/4000K/5003K	80
WPG-120W	120W	16,800lm	140lm/W	3000K/4000K/5000K	80

### Photometrics:

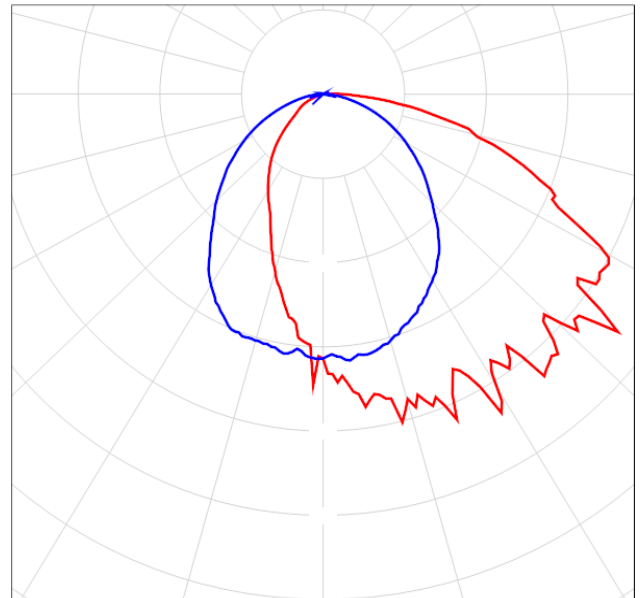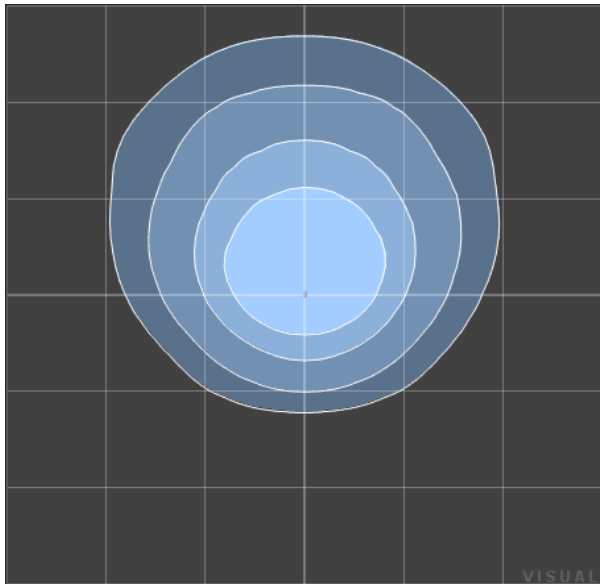

### Lighting Layout:

