



Project Name:

Type:

Catalog#:

The WPS is a precise engineered tiltable wall-mounted luminaire that offers forward-throw light distribution to cover the biggest possible area with an incredible low profile and dark-sky cut-off body design.

It's tiltable design allows it to shoot the light even farther.

Ordering SKU:

Model	Wattage	CCT	Control	Color	Voltage
WPS	20W=20W	30K=3000K	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
Slim Wall Pack	35W=35W	40K=4000K	PCB=Button Photocell	BL=Black	HV=347/480VAC
	75W=75W	50K=5000K	OCC01=On/Off Sensor	WH=White	
	120W=120W		OCC01=Bi-Level Sensor	GR=Gray	
			EM=Emergency Backup		

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
WPS-20W	20W	2,600lm	130lm/W	3000K/4000K/5000K	70+
WPS-35W	35W	4,550lm	130lm/W	3000K/4000K/5000K	70+
WPS-75W	75W	9,750lm	130lm/W	3000K/4000K/5000K	70+
WPS-120W	120W	15,600lm	130lm/W	3000K/4000K/5000K	70+

Features & Specs

Construction:

- Slim, Low profile Dies cast aluminum housing with hidden cooling fins.
- Corrosion resistant polyester powder coat finish, available in custom colors.
- Independent driver compartment separated from light engine that optimizing driver lifespan and watertight.
- Rotatable light engine.

Mounting:

- Regular wall mount.

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.

Optical:

- Forward-throw optic to maximize light utilization.

Controls Options:

- Button style eye photocell.
- External occupancy sensor.

Warranty:


- 5 years warranty for complete fixture.

Listings:

- UL
- DLC Premium
- RoHs
- IP65



Photometrics:

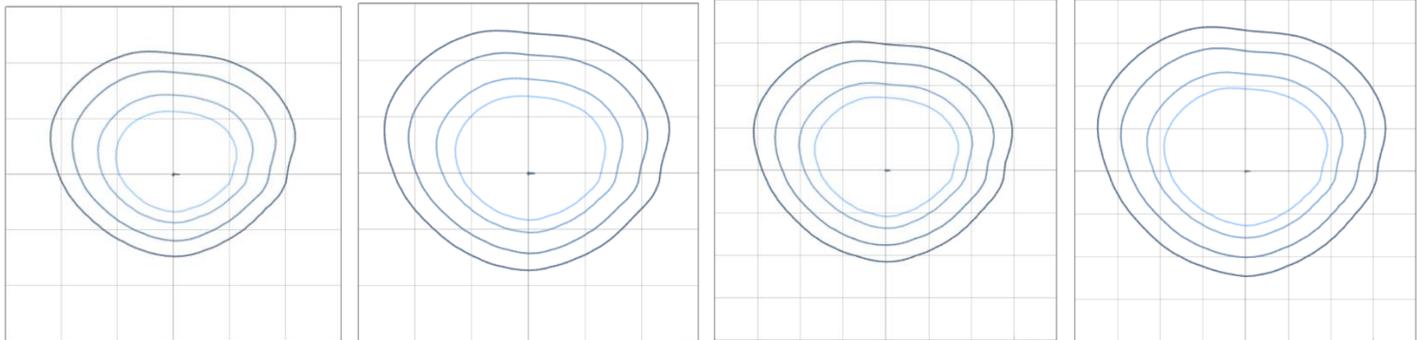


20W@15FT

35W@15FT

70W@15FT


120W@15FT



Polar Distribution

0.1 fc
0.2 fc
0.5 fc
1 fc
MH 15

Dimensions:

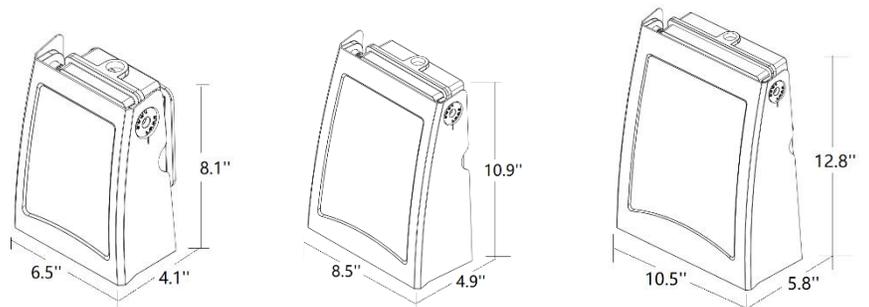

20W/35W

75W

120W