



Project Name:

Type:

Catalog#:

NBFL series is a heavy-duty LED flood light luminaire who offers many different beam angles. It's on-chip optic helps focus the light in a much more efficient way.

It can be widely used in all exterior flood lighting application with its standard 2-3/8" Slip fitter, 1/2" Knuckle & Yoke mount.

### Ordering SKU:

SKU	Wattage	CCT	Beam Angle	Mounting	Control	Finish Color	Voltage
<b>NBFL</b>	<b>60W=60W</b>	<b>30K=3000K</b>	<b>15D=15 degrees</b>	<b>KN=1/2" Knuckle (60W only)</b>	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
Narrow Beam Flood Light	<b>120W=120W</b>	<b>40K=4000K</b>	<b>30D=30 degrees</b>	<b>SF=Slip Fitter (120W &amp; 200W)</b>	<b>PCB=Button Photocell</b>	<b>BL=Black</b>	<b>HV=347/480VAC</b>
	<b>200W=200W</b>	<b>50K=5000K</b>	<b>45D=45 degrees</b>	<b>YK=Yoke</b>		<b>WH=White</b>	
			<b>60D=60 degrees</b>			<b>GR=Gray</b>	

### Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
NBFL-60W	60W	7,800lm	130lm/W	30K/40K/50K	80+
NBFL-120W	120W	15,600lm	130lm/W	30K/40K/50K	80+
NBFL-200W	200W	26,000lm	130lm/W	30K/40K/50K	80+

# Features & Specs

## Construction:

- Heavy-duty die casted aluminum housing.
- Superior heat sinking with external Air-Flow fins.
- IP65 for wet and damp locations.

## Mounting:

- 1/2" Knuckle Mount.
- 2-3/8" Slipfitter Mount.
- Arm mount for light pole.
- Yoke Mount.

## Electrical:

- High Power Factor, low THD UL listed driver.
- Universal line voltage input 120-277V, 347/480V optional.
- FCC compliant.

## Optical:

- Narrow beam optics 15°/30°/45° & 60° optional.

## Controls Options:

- Button style eye photocell.

## Warranty:


- 5 years warranty for complete fixture.

## Listings:

- ETL
- DLC
- RoHS
- IP65



## Photometrics:

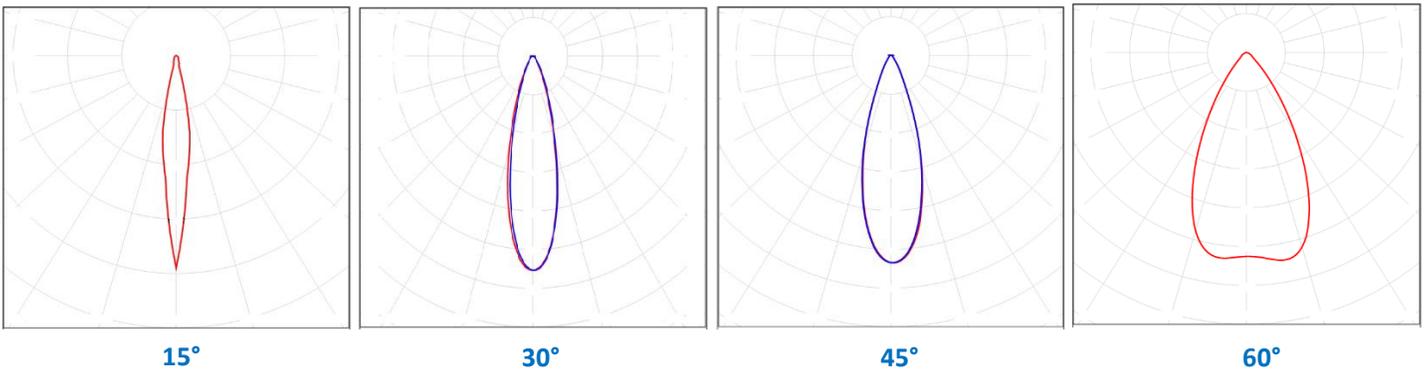

## Mountings:



1/2" Knuckle



Arm Mount



Slip Fitter



Yoke/Trunnion

## Dimensions:

