

Project Name:

Type:

Catalog#:

The VP LED vapor tight light is an energy efficient durable enclosed fixture designed for wet and damp to withstands rugged environments.

It is vandal resistant and can be used both indoors and outdoors like carport, parking garage, canopies, storage rooms, garden centers, food service and other wet locations.

Ordering SKU:

SKU	Wattage	Size	CCT	Control	Voltage
VP	40W=40W	4FT=4'	30K=3000K	(blank)=none, Std	(blank)=120/277VAC, Std
	60W=60W	8FT=8'	40K=4000K	EM=Emergency Backup	HV=347/480VAC
	80W=80W		50K=5000K	OCC01=On/Off sensor	
				OCC02=Bi-Level Sensor	

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
VP-40W-4FT	40W	5,200lm	130lm/W	4000K/5000K	80+
VP-60W-FT	60W	7,800lm	130lm/W	4000K/5000K	80+
VP-40W-8FT	40W	5,200lm	130lm/W	4000K/5000K	80+
VP-80W-8FT	80W	10,400lm	130lm/W	4000K/5000K	80+

Features & Specs

Construction:

- Lightweight, flexible and durable polycarbonate construction makes the luminaire vandal resistant and highly impact resistant.
- UV stabilized and glare-free polycarbonate diffuser.
- Large wiring compartment and multiple knockouts to accommodate lighting controls.

Mounting:

- Surface mount.
- Suspension mount.

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.
- 0-10V dimmable.

Optical:

- Glare-free wide beam frosted Polycarbonate diffuser.

Controls Options:

- Bi-Level & On/Off Occupancy sensor.
- Emergency backup.

Warranty:


- 5 years warranty for complete fixture.

Listings:


UL
DLC Premium
RoHs
IP65



Photometrics:

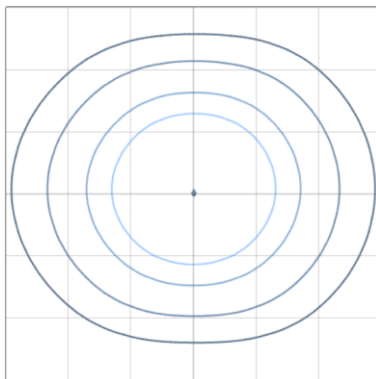


40W@15FT

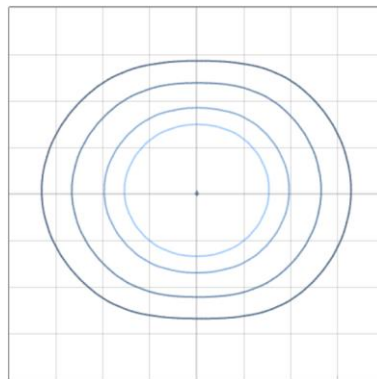

60W@15FT

0.1 fc
0.2 fc
0.5 fc
1 fc
MH 15

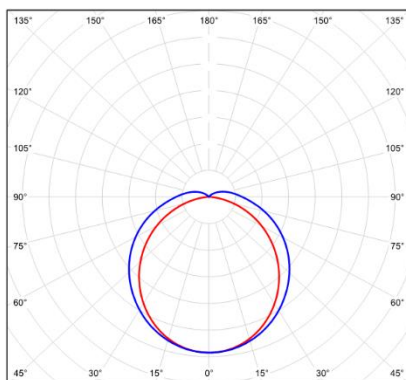

Polar Distribution

Dimensions:

