



Project Name:

Type:

Catalog#:

The WPSL is a low-profile & nice-looking wall mounted luminaire combined with industry leading performance 170lm/W.

### Ordering SKU:

Model	Wattage	CCT	Control	Color	Voltage
<b>WPSL</b>	<b>60W=60W</b>	<b>30K=3000K</b>	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
Large Slim Wall Pack	<b>90W=90W</b>	<b>40K=4000K</b>	<b>PCB</b> =Button Photocell	<b>BL</b> =Black	<b>HV</b> =347/480VAC
	<b>120W=120W</b>	<b>50K=5000K</b>	<b>OCC</b> =Bi-Level Motion Sensor	<b>WH</b> =White	
			<b>EM</b> =Emergency Backup	<b>GR</b> =Gray	

### Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
WPSL-60W	60W	10,200lm	170lm/W	3000K/4000K/5000K	80+
WPSL-90W	90W	15,300lm	170lm/W	3000K/4000K/5000K	80+
WPSL-120W	120W	20,400lm	170lm/W	3000K/4000K/5000K	80+

# Features & Specs

## Construction:

- Slim, Low-profile Dies cast aluminum housing.
- Corrosion resistant polyester powder coat finish, available in custom colors.
- Independent driver compartment separated from light engine that optimizing driver lifespan and watertight.

## Mounting:

- Regular wall mount.

## Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.

## Optical:

- Forward-throw optic to maximize light utilization.

## Controls Options:

- Button style eye photocell.
- Bi-Level dimming occupancy sensor.
- Emergency backup.

## Warranty:


- 5 years warranty for complete fixture.

## Listings:


UL  
DLC Premium  
RoHs  
IP65




## Photometrics:

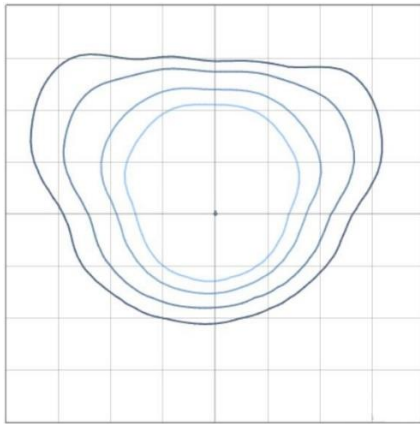

60W@15FT

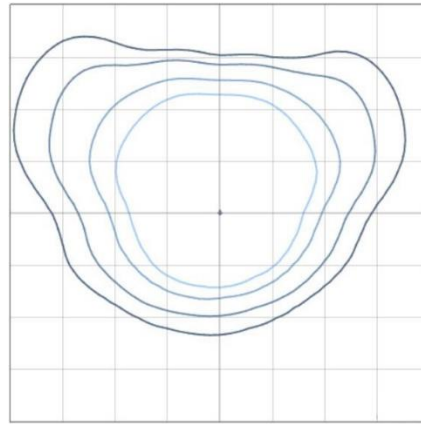


90W@15FT

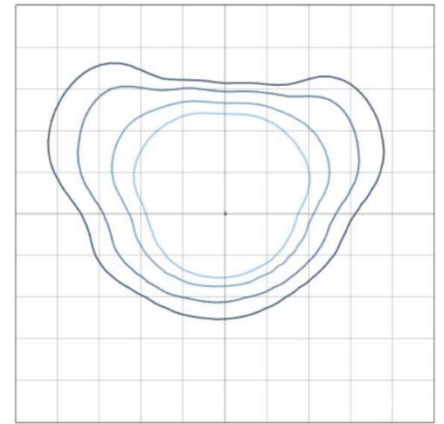

120W@15FT

## Polar Distribution

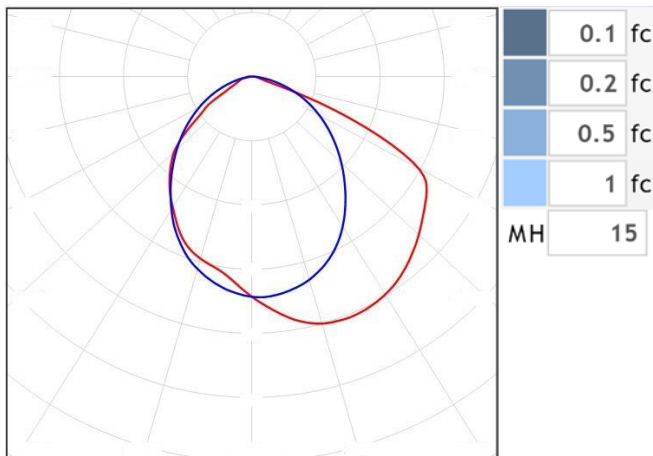

## Dimensions:

