

General Description:

The WPHC is a half cylinder shape wall pack designed to be stylish and architectural.

A wide range of control options are available including Occ sensor, Photocell and Emergency backup.

Construction:

- Heavy duty aluminum housing
- Glare-free optic
- IP65 for wet and damp locations
- With wall washing up light

Mounting:

- Regular in-wall J-box

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- 0-10V dimmable optional

Optical:

- Glare-free Polycarbonate lens.

Controls:

- Button style eye photocell.
- Bi-Level Occupancy sensor.
- Build-in emergency backup.

Warranty:

- 5 years warranty for complete fixture

Listings:

ETL
DLC
RoHS
IP65



Order Info:

Model	Wattage	CCT	Control	Color	Voltage
WPHC	40W=40W	30K=3000K	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
Half Cylinder Wall Pack	60W=60W	40K=4000K	PCB=Button Photocell	BL=Black	HV=347/480VAC
	80W=80W	50K=5000K	OCC=Bi-Level Motion Sensor	WH=White	
			EM=Emergency Backup	GR=Gray	



PROJECT NAME: _____ CATALOG NUMBER: _____

NOTES: _____ FIXTURE TYPE: _____

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
WPHC-40W	40W	6,000lm	150lm/W	3000K/4000K/5000K	80+
WPHC-60W	60W	9,000lm	150lm/W	3000K/4000K/5000K	80+
WPHC-80W	80W	12,000lm	150lm/W	3000K/4000K/5000K	80+

Photometrics:

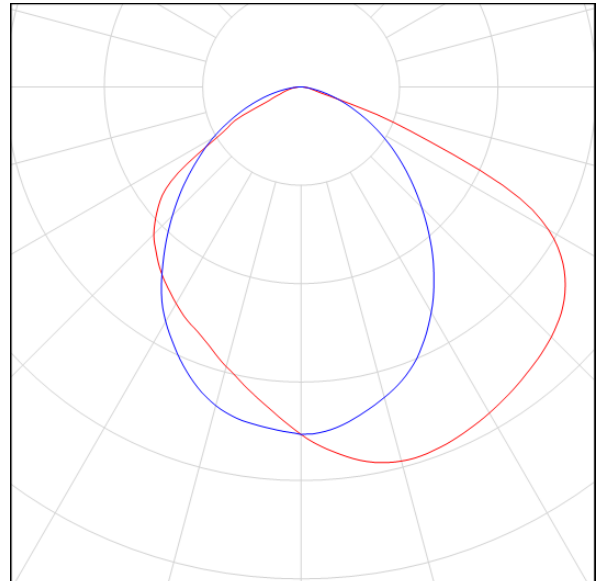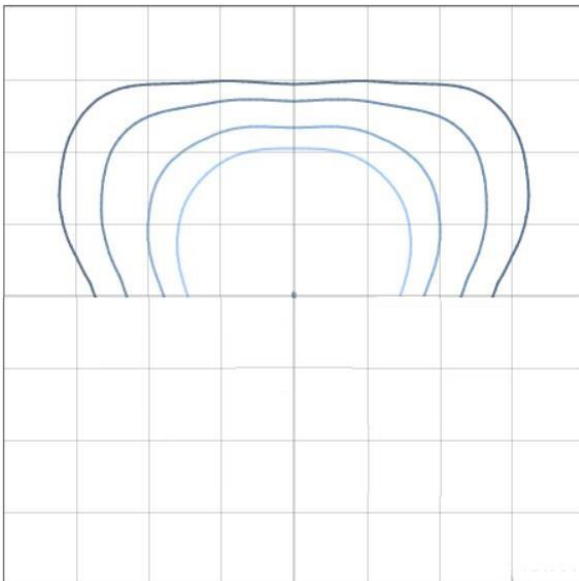

Lighting Layout:

